


Picture shows HST-SE2 with variation code VC0001749.

Intended use

The key operated switch HST-SE2 is used to switch off the power supply to the load circuits of machines or plants without shutoff delays, with rated currents up to 20A.

Other applications are prohibited.


Function



Position 1:
All keys can be removed.

Change key

Switch key




Position 0:
All keys can be removed one after the other.

Article	Variation code	Pin connections	Amperage
60054	VC0001749	1 NC / 1 NO	20 A
60054	VC0001751	2 NC / 2 NO	20 A
60054	VC0001753	4 NO	20 A

Technical data

Environment:	Indoor/outdoor
Temperature range:	-20°C to +40°C
Humidity:	Up to 100% (standard climate)
Material	
Lock:	Stainless steel
Mounting plate:	Galvanised steel
Earthing plate:	Galvanised steel
Ambient atmosphere:	Industrial environments
Mounting position:	All positions
Mechanical service life	
Lock:	280.000 actuations
Switch:	1.000.000 actuations
Mission time:	15 years
B10d-values	
Switch;	
Rated operating current	
16/20 A:	36.000 switching operations
Switch;	
for 24 V DC and 0,21 A:	1.000.000 (in conjunction with PNOZ X3)
MTTFd:	Depending on application
Protection class:	IP 2x
Reference standard for rotary switch:	EN 60947-3

Dimensions built-in version HST-SE2

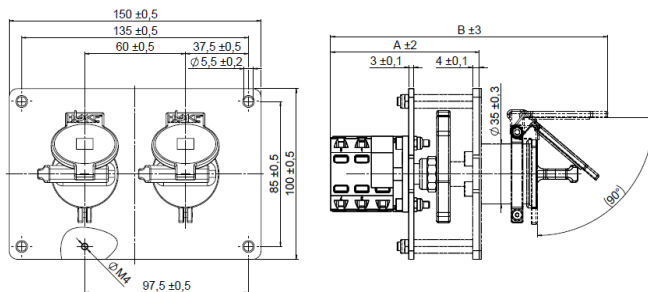

All dimensions in mm.

Haake Technik GmbH
Master Esch 72
48691 Vreden
Germany

info@haake-technik.com
www.haake-technik.com
T: +49 (0) 2564 3965 0
F: +49 (0) 2564 3965 90