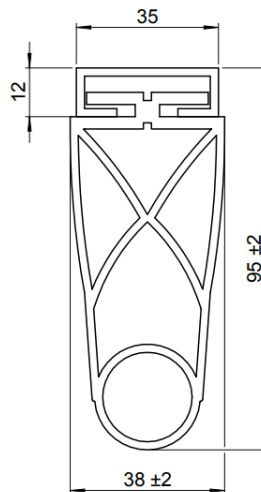


Anfrage

First and last name		E-Mail:	
Company:			
Street and no.:			
Postal code/ ZIP and city:		Country:	
Phone no.:		Mobil no.:	



all dimensions in mm

Length and Quantity

Length: _____ mm*	Qty: _____
-------------------	------------













* max. length: 3500 mm /special lengths on request

Ambient conditions

At which type of machine will the bumper be mounted?		
Is there a medium present? If yes, which one (for instance acids, lyes, oils)?		
Where is the application site?	☐ indoor	☐ outdoor
What is the mounting orientation?	☐ horizontal	☐ vertical
What is the stopping travel?		
Temperature range in use?	from -20°C to +55 °C other temperature range:	
IP protection class?		

* The stopping travel, also known as overrun distance, describes the braking distance after actuation of the emergency stop until the application to be secured comes to a standstill.

Type and position of cable exit

Top (only available with threaded bolts, see also Mounting possibilities)		
☐  Top left, x = 50 mm	☐  Top right, x = 50 mm	☐  Top left and right, x = 50 mm
At side		
☐  Front left, x = 50 mm	☐  Front right, x = 50 mm	☐  Front left and right, x = 50 mm
☐  Rear left, x = 50 mm	☐  Rear right, x = 50 mm	☐  Rear left and right, x = 50 mm
Frontal		
☐  Frontal left	☐  Frontal right	☐  Frontal left and right

Cable length

☐ 1.000 mm (standard)	☐ _____ mm (Upon request, surcharge)
--	---

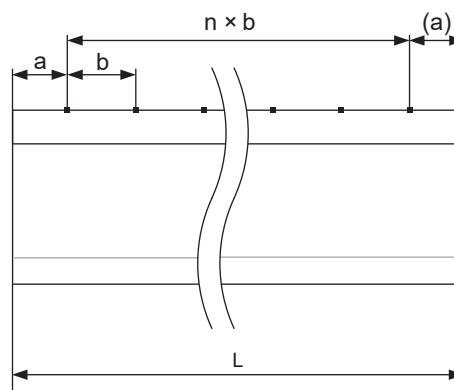
* max. length: 50.000 mm (possible in 500 mm steps)

Mounting possibilities

☐ No mounting possibilities (made by client)		
Threaded bolts M6 ×	☐ 14	☐ 23 (effective length)
Threaded bolts M8 ×	☐ 18	☐ 28 (effective length)
Boreholes ø = 6 mm		
☐ Oblong holes 7.5 × 21 mm		

Dimensions

Mounting dimensions are specified by variables a and b.	
a is for first and last distances (symmetrical design) and b is for intermediate distances.	
☐ Selected by manufacturer	☐ Own distances a = ____ b = ____ mm



Additional information

Please describe your safety application. Additional specifications can be named here.

Please note, the following links will only work with the Adobe Acrobat Reader:

If you don't have an Acrobat Reader, you can send us the filled formular as an attachement to the following

E-Mail address: info@haake-technik.com



Haake Technik GmbH
Master Esch 72
48691 Vreden
GERMANY

info@haake-technik.com
www.haake-technik.com
T: +49 2564 39650
F: +49 2564 396590